

Model 5186

Differential Voltage Preamplifier



FEATURES

- ◆ High input impedance
- ◆ Low noise
- ◆ True differential input
- ◆ Adjustable gain
- ◆ 0.5 Hz to 1 MHz frequency response
- ◆ Battery or external DC power

APPLICATIONS

- ◆ Acoustic research
- ◆ Radio astronomy
- ◆ AC bridge measurements
- ◆ Oscilloscope preamplification
- ◆ Hall-effect signal amplification

DESCRIPTION

The model 5186 is a high input impedance, low-noise, AC-coupled voltage preamplifier which offers a true differential input. It has a frequency response from 0.5 Hz to 1 MHz and three switched gain settings of $\times 10$, $\times 100$ and $\times 1000$. It is a general purpose preamplifier which has the facility to be connected to grounded sources in a manner which breaks ground loops and since it has a true differential input it can be used to measure floating sources, such as the output from an AC bridge, without imposing an asymmetrical load onto the source. It can be powered from its own internally housed (alkaline) batteries, an external low voltage supply (± 15 V or ± 18 V) or from the model PS0108 remote line power supply (optional extra). This preamplifier can also be powered from most of our range of lock-in amplifiers.

Specifications

General

AC coupled voltage amplifier with adjustable voltage gain and a maximum frequency response extending from 0.5 Hz to 1 MHz. True differential input and single-ended output via BNC connectors.

Battery powered from internal alkaline batteries or external DC power supplies.

Inputs

Modes True differential
Coupling AC
Impedance $100\text{ M}\Omega // 20\text{ pF}$
Frequency Response 0.5 Hz to 1 MHz
C.M.R.R.

$\times 1000$ gain > 110 dB (100 Hz to 1 kHz), degrading by 6 dB/octave above 1 kHz
 $\times 10$ or $\times 100$ gain > 90 dB (100 Hz to 1 kHz), degrading by 6 dB/octave above 1 kHz

Max common-mode input voltage, $\times 1000$ gain 5 V pk-pk
Max input without damage

Noise

± 15 V DC or 10 V rms. AC @ 50 Hz see Figure 1.
Typically $4\text{ nV}/\sqrt{\text{Hz}}$ @ 1 kHz and $\times 1000$ gain;
 $10\text{ nV}/\sqrt{\text{Hz}}$ @ 1 kHz and $\times 10$ or $\times 1000$ gain

Gain $\times 10$, $\times 100$ or $\times 1000$

Gain Accuracy $\pm 1\%$
Gain Stability $\pm 150\text{ ppm}/^\circ\text{C}$

Output

Impedance $450\ \Omega$
Max voltage swing > 10 V pk-pk
Slew rate > 22 V/ μs
Polarity Non-inverting
Distortion < 0.01% T.H.D.

Power

Internal Four 9 V alkaline batteries provide approximately 12 hours of use
External
a) ± 15 V or ± 18 V DC @ 27 mA
b) 110 V AC or 240 V AC via optional external model PS0108 power supply

Dimensions

(excluding connectors) 8.25" wide x 11" deep x 3.5" high (210 mm wide x 279 mm deep x 89 mm high)
Weight 5.3 lbs. (2.4 kg) excluding power supply

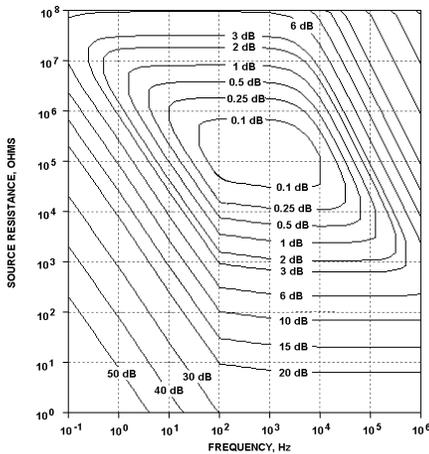


Figure 1, Model 5186 Noise Figure Contours (Typical)